


Selection Guideline for MicroShade® products

Middle Europe – façade applications

MicroShade® is a highly effective shading product consisting of an almost invisible film combining UV and IR coatings with a structured micro-lamella. The shading efficiency depends on the incidence angle of the sun on the lamellas. When the sun is high in the sky during the summer, MicroShade® provides the strongest shading and during winter when the sun is low more heat is allowed into the building. Similarly, the shading efficiency also varies during the course of the day due to the different positions of the sun morning, noon and evening.

For façade applications¹ MicroShade® is commonly combined with either a low energy coating or an extra low energy coating. An extra low energy coating provides a stronger shading, whilst a low energy coating allows more daylight inside.

The obtained shading is best expressed using the effective g-value – and with a MicroShade® glazing, this value depends on the orientation of the façade. The figure below shows which type of low energy coating a MicroShade® product should be combined with at given façade directions.

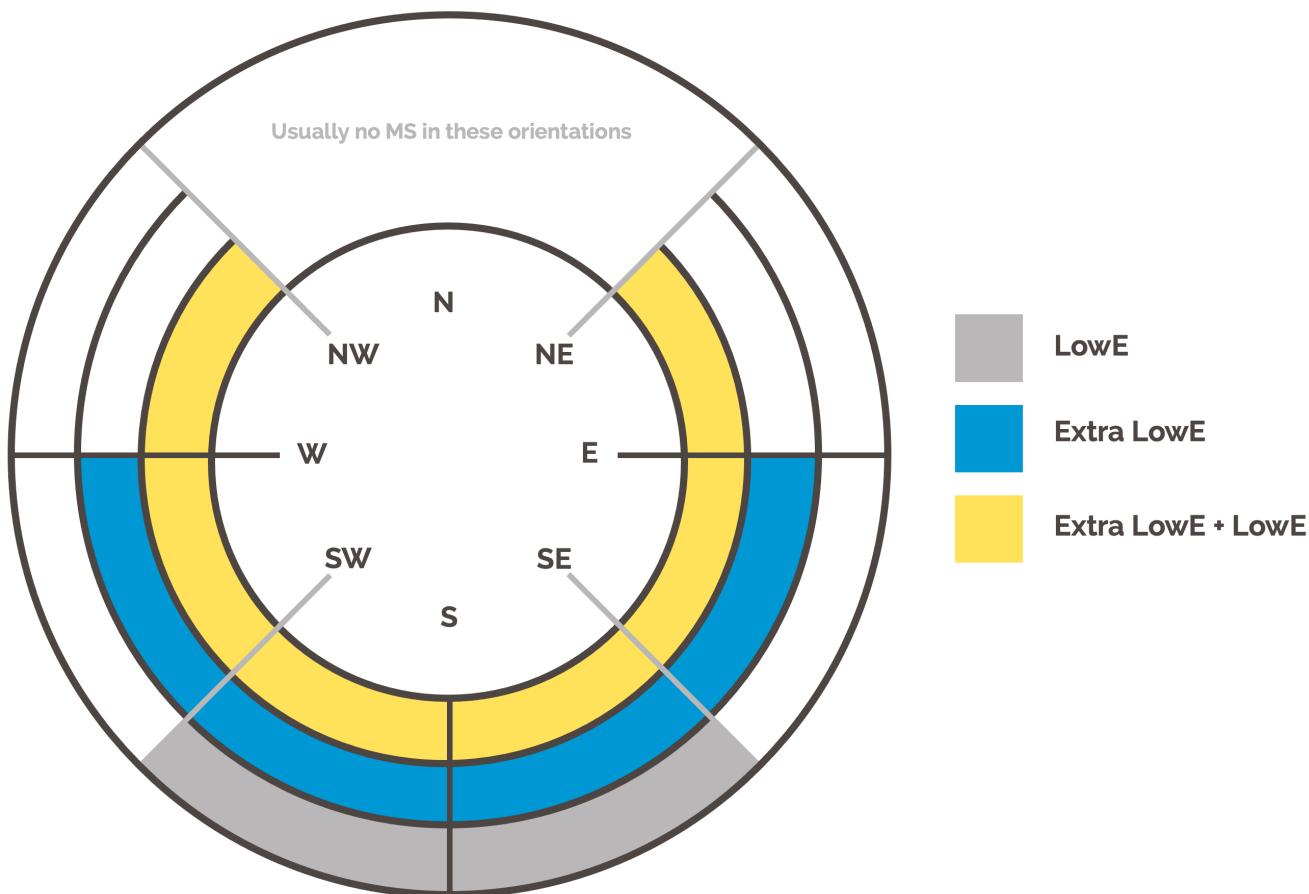

¹Façade application means glazing mounted in a near vertical position.



Key performance data for 2-layer glazing with MicroShade®

The tables below indicate the light transmittance LT_o and the mean effective g-value in the summer period (June to end of August) for two layer MicroShade® glazing.

MS-F 60/14 with a low-e coating ¹		U-value ³ (W/m ² K)	LT _o	Effective g-value, summer period (June to end of August) ⁴						
Orientation				315° NW	270° W	225° SW	180° S	135° SE	90° E	45° NE
Hamburg	1.12	0.56	-	-	-	0,19	0,15	0,19	-	-
Berlin				-	-	0,18	0,15	0,19	-	-
Frankfurt				-	-	0,18	0,15	0,18	-	-
Munich				-	-	0,18	0,14	0,18	-	-
Gdansk				-	-	0,18	0,15	0,19	-	-
Warsaw				-	-	0,18	0,15	0,18	-	-
Krakow				-	-	0,18	0,14	0,18	-	-
Amsterdam				-	-	0,18	0,15	0,18	-	-
Paris				-	-	0,18	0,15	0,18	-	-

MS-F 60/14 with an extra low-e coating ²		U-value (W/m ² K)	LT _o	Effective g-value, summer period (June to end of August) ⁴						
Orientation				315° NW	270° W	225° SW	180° S	135° SE	90° E	45° NE
Hamburg	1.04	0.50	0,18	0,18	0,19	0,16	0,13	0,16	0,19	0,17
Berlin				0,18	0,19	0,16	0,13	0,16	0,19	0,18
Frankfurt				0,17	0,18	0,16	0,13	0,16	0,19	0,17
Munich				0,18	0,19	0,15	0,12	0,15	0,19	0,17
Gdansk				0,18	0,19	0,16	0,13	0,16	0,19	0,18
Warsaw				0,17	0,19	0,16	0,13	0,16	0,19	0,17
Krakow				0,17	0,19	0,16	0,12	0,16	0,19	0,17
Amsterdam				0,17	0,18	0,16	0,13	0,16	0,19	0,17
Paris				0,17	0,18	0,16	0,13	0,16	0,19	0,17

1) 6 mm tempered float + MS – 16 mm argon – 6 mm Planitherm XN

2) 6 mm tempered float + MS – 16 mm argon – 6 mm Planitherm One

3) U-value is calculated according to EN 673:2011

4) Effective g-value calculated according to EN 410:2011.



Key performance data for 3-layer glazing with MicroShade®

The tables below indicate the light transmittance LT_o and the mean effective g-value in the summer period (June to end of August) for two layer MicroShade® glazing.

MS-F 60/14 with two low-e coatings ¹		U-value (W/m ² K)	LT _o	Effective g-value, summer period (June to end of August)						
Orientation			0.64	315°	270°	225°	180°	135°	90°	45°
				NW	W	SW	S	SE	E	NE
Hamburg			0.51	-	0,18	0,15	0,12	0,15	0,18	-
Berlin				-	0,19	0,15	0,12	0,15	0,19	-
Frankfurt				-	0,18	0,15	0,12	0,15	0,18	-
Munich				-	0,19	0,15	0,11	0,15	0,19	-
Gdansk				-	0,19	0,15	0,12	0,15	0,19	-
Warsaw				-	0,18	0,15	0,12	0,15	0,18	-
Krakow				-	0,18	0,15	0,11	0,15	0,18	-
Amsterdam				-	0,18	0,15	0,12	0,15	0,18	-
Paris				-	0,18	0,15	0,12	0,15	0,18	-

MS-F 60/14 with an extra low-e and a low-e coating ²		U-value (W/m ² K)	LT _o	Effective g-value, summer period (June to end of August)						
Orientation			0.61	315°	270°	225°	180°	135°	90°	45°
				NW	W	SW	S	SE	E	NE
Hamburg			0.45	0,15	0,16	0,13	0,11	0,13	0,16	0,15
Berlin				0,15	0,16	0,13	0,10	0,13	0,16	0,15
Frankfurt				0,15	0,16	0,13	0,10	0,13	0,16	0,14
Munich				0,15	0,16	0,13	0,09	0,13	0,16	0,15
Gdansk				0,15	0,16	0,13	0,10	0,13	0,16	0,15
Warsaw				0,14	0,16	0,13	0,10	0,13	0,16	0,14
Krakow				0,15	0,16	0,13	0,10	0,13	0,16	0,15
Amsterdam				0,14	0,15	0,13	0,10	0,13	0,16	0,15
Paris				0,14	0,16	0,13	0,10	0,13	0,16	0,14

1) 6 mm tempered float + MS-F 60/14 – 14 mm argon – 6 mm Planitherm XN – 14 mm argon – 6 mm Planitherm XN

2) 6 mm tempered float + MS-F 60/14 - 14 mm argon - 6 mm Planitherm One - 14 mm argon - 6mm Planitherm XN

MS-F 60/14
with two extra low-e
coatings¹⁾

U-value
(W/m²K)

LT₀

Effective g-value, summer period (June to end of August)

Orientation			315° NW	270° W	225° SW	180° S	135° SE	90° E	45° NE
Hamburg	0.59	0.41	-	0,14	0,12	0,10	0,12	0,14	-
Berlin			-	0,14	0,12	0,09	0,12	0,14	-
Frankfurt			-	0,14	0,12	0,09	0,12	0,14	-
Munich			-	0,14	0,11	0,09	0,11	0,14	-
Gdansk			-	0,14	0,12	0,09	0,12	0,15	-
Warsaw			-	0,14	0,12	0,09	0,12	0,14	-
Krakow			-	0,14	0,12	0,09	0,12	0,14	-
Amsterdam			-	0,14	0,12	0,09	0,12	0,14	-
Paris			-	0,14	0,12	0,09	0,12	0,14	-

1) 6 mm tempered float + MS-F 60/14 – 14 mm argon – 6 mm Planitherm One – 14 mm argon – 6 mm Planitherm One